

Government of India
Bhabha Atomic Research Centre
Ion Accelerator Development Division
FOTIA Facility

Tender No.: IADD/FOTIA/Partition/SS/2021/OPA/ 118520

Sub: Supply, Fabrication and Erection of Composite Panel (ACP)- Aluminium Partition in New Beam hall of FOTIA Facility, Van-de- Graaff Bldg., BARC, Mumbai

Dear Sir,


Please let us have your competitive rate for Supply, Fabrication and Erection of Composite Panel (ACP)- Aluminium Partition as per drawing and Annexure-1 in New Beam hall of FOTIA Facility, Van-de- Graaff Bldg.

Please note that all material to be used shall be of ISI marks and supplier has to quote accordingly. The work involves supply and fixing of above material inside BARC premises.

Your quotation addressed to **Head, Ion Accelerator Development Division**, Van-de-Graaff Building, BARC, Trombay Mumbai 400085 Attn. Shri. Shankar Sarode, FOTIA Section, in a sealed envelope by **INDIA POST ONLY** quoting tender number and due date, along with your PAN No/ GST No., etc. must reach on or before September 24, 2021, at 17.00 hrs.

Thanking you.

Sincerely yours



(Shankar Sarode)
FOTIA Section, IADD
03/9/21

Annexure-1

Tender No.: IADD/FOTIA//Partition/SS/2021/OPA/ 118520.

Sub: Supply, Fabrication and Erection of Composite panel (ACP)- Aluminium Partition as per drawing and Annexure-1 in New Beam hall of FOTIA Facility, Van-de- Graaff Bldg.

- a. All Aluminium sections of **Jindal** make, Size: 100mm X 45mm X **3mm thick** shall be used for fabrication and shall confirmed ISI standards for executing the work order.
- b. All aluminium sections to be used for fabrication shall be anodized and thickness of coating should not be less than **40 microns**. The color of Al section and ACP will be as per choice of the officer initiating the work order. The Supplier has to submit samples of ACP/Al sections and colors available before executing the work order.
- c. Al. Composite Panel (ACP) of **6 mm** thick, make-**VIVO/TIMEX or ALTO BOND** shall be used and other materials like Aluminium beading, lining/gasket, brass screws, mastic filling, nuts, washers, handles, Aldrops, etc. shall be of ISI marks only.
- d. All door accessories like Latch, handles, door closers, Locks, tower bolts shall be of **GODREJ MAKE** on both sides with air tight gasket for door size: L-8' X H -8' (8' x4'- 02 nos) as per attached drawing.
- e. The approximate total area of Aluminium -Composite sheet partition to be supplied, fabricated and erected in new beam hall, VDG bldg. will be 660 Sq. Ft. but quantity may vary depending upon the site requirements. Therefore, the Vendors are requested to submit Al- ACP partition rate in per square (Rupees/Sq.ft) feet only.
- f. Contractor will have to carry out civil work if required, for restoration of civil structures affecting during above work for that no additional payment will be made.




(Shankar Sarode)
FOTIA Section, IADD

Approved:



(Arun Agarwal)
Head, FOTIA Section, IADD

Aluminium Partition - L - 55' X H - 12' (Approx)

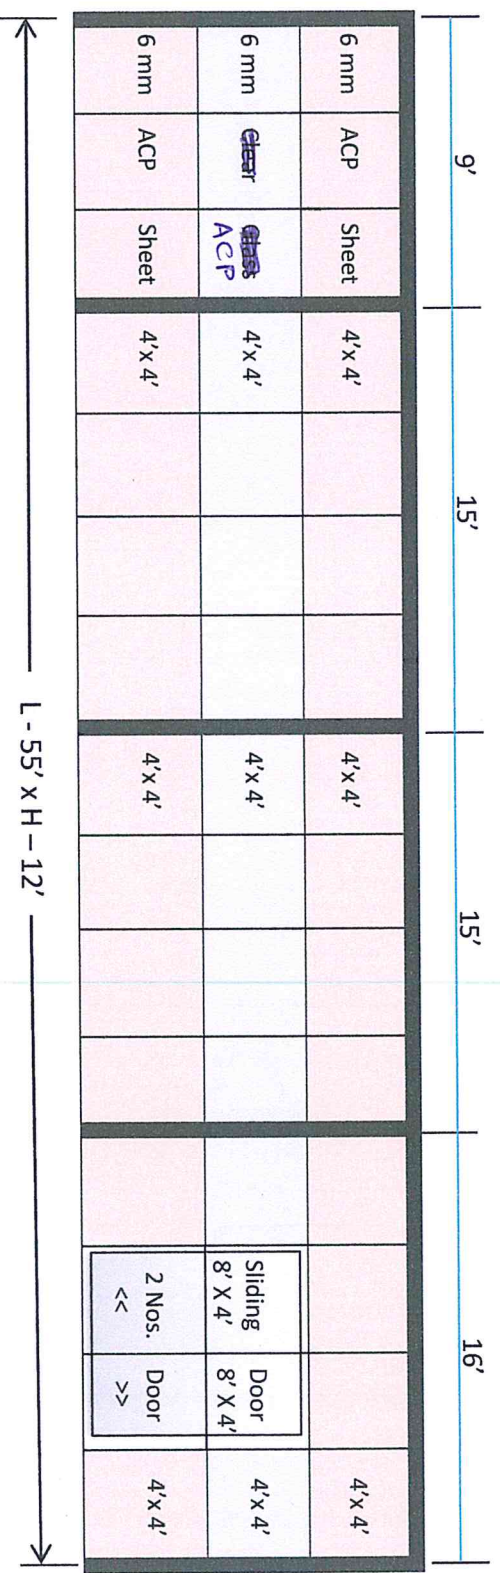

Tender No.: IADD/FOTIA/Partitions/SS/2021/OPA/118520.